


# BRL

ELECTROMECHANICAL road barriers  
for passages from 2,5 mt up to 6 mt.

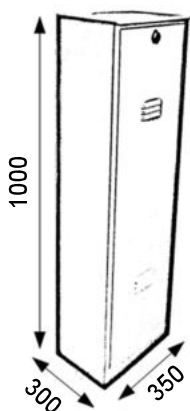

## TECHNICAL SPECIFICATIONS

	BRL 4.0	BRL 6.0
Power Supply	230v - 50/60 HZ	230v - 50/60 HZ
Motor power supply	24Vdc	24Vdc
Absorbed power	90W	90W
Absorbed current	3,75A	3,75A
Motor rotation speed	1800	1800
Use frequency	200 cycles\h	200 cycles\h
Operating temperature	-20°C / +55°C	-20°C / +55°C
Opening time	4"	8"
Lubrification	Permanent grease	Permanent grease
Use	Intensive	Intensive
IP grade	IP55	IP55
Weight	49,0 Kg	51,0 Kg

## AVAILABLE ACCESSORIES



12/24V SAFETY  
PHOTOCELLS



2CH REMOTE  
CONTROL



4CH REMOTE  
CONTROL



METAL SKIRT  
FOR ARM



LOOP DETECTOR